# SURETRAP® LAUNCHERS & RECEIPED TO THE PROPERTY OF THE PROPERTY STRENGTH ON THE LINE.

The SureTrap® traditional pigging system pairs reliability and flexibility with intelligent controls to strengthen both pigging performance and economics. All with the exacting level of quality, integrity and value you've come to expect from a WeldFit system.

Available options from ILI pull ports to equalization lines and other add-ons upon request. Reach out to your WeldFit representative to learn more.

4133 Southerland Rd. | Houston, TX 77092 | 713-460-3700 | Weldfit.com

WELDFIT

# THE SURETRAP®

# **PIGGING SYSTEM**

The SureTrap® pigging system locks in solid performance for your operation by delivering superior strength, better value and a wide range of configurations and options. SureTrap® systems are made with oversized barrels for ease in the loading and unloading of pigs. Additionally, the use of eccentric reducers on launchers and concentric reducers on receivers improve the system's pig launching and receiving capabilities. And all connections are sized based on industry best practices and standards to provide a system that will work with any setup.

These systems are also highly configurable, enabling you to place outlets where you want them to save time and space or meet specific operational or code requirements. The launchers and receivers can also be skid-mounted with ancillary valves and piping for ease of installation into a customer's pipeline system.

# **BENEFITS AND FEATURES**

# 01

# **OVERSIZED BARRELS**

for easier pig handling and loading

# 02

### SURESEAL®

quick-opening closure comes standard on all units

# 03

## STRONG PERFORMANCE

and the best overall package value

# 04


### HIGHLY CUSTOMIZABLE

for almost any operational, spatial or code requirements

# 05

## SKID-MOUNTED

launchers and receivers available

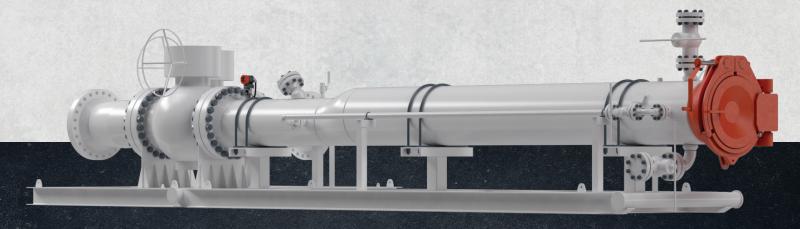

### CONNECTIONS

Flange or Weld-end available

### NIDZZI ES

All nozzles for vents, gauges and drains come standard

### FINISH

All units are primed and painted

### COMPLIANCI

Designed to meet all applicable codes and safety factors

# SIZE RANGE

4" to 48" nominal pipe size